


滑動開關

Slide Switch

http://www.bomin.com.tw

型號說明 Ordering Information

SLS-01-42A1

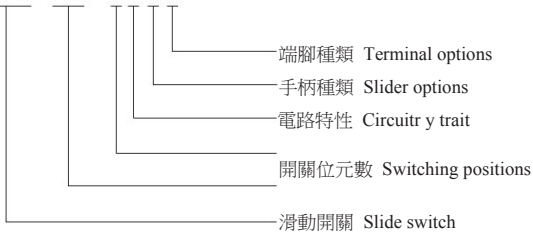


技術特性 Specification

- 規格 Rating: 6(1)A 250VAC
10(2)A 125VAC
- 接觸電阻 Contact Resistance: 20mΩ max
- 絕緣電阻 Insulation Resistance: 500VDC 100MΩ min
- 耐電壓 Dielectric Strength: 1500VAC, 1Minute
- 操作溫度 Operating Temperature: -25°C ~ +85°C 產品序號 product order
- 電氣壽命 Electrical Life: 10,000 Cycles




開關位元數 Switching positions	2	3	4	5
電路特性 Circuitry trait	1	1	1	1
	2	2	2	2
	3	3	3	3
	4	4	4	4

手柄種類 Slider option

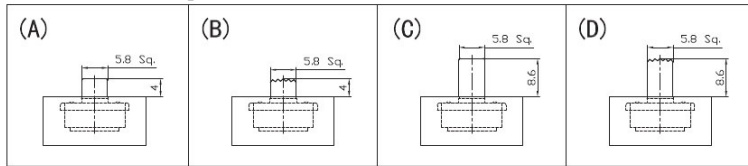

端子種類 Terminal options

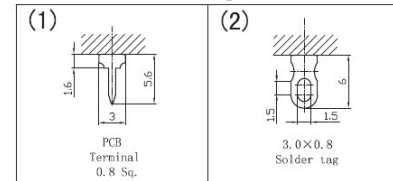

	SLS-01-22B1		
	SLS-01-42A1		
	SLS-02-32C2		
	KBB45-2P2W ON-ON 1A 125VAC; 0.5A 250VAC DPDT 6P		

滑動開關

Slide Switch



KBB45-2P3W ON-ON-ON

1A 125VAC;0.5A 250VAC

DP3T 8P

